




KYMETA™ u7 TERMINAL

REVOLUTIONARY MOBILE CONNECTIVITY

Kymeta™ u7 Ku-band satellite terminals address the need for lightweight, low-profile, and high-throughput communication systems on-the-move. The u7 family of terminals makes connectivity for nearly any vehicle, vessel, or fixed platform easier and more reliable than ever before.

KĀLO™ satellite services from Kymeta can be bundled with Kymeta u7 terminals and purchased in flexible, variable usage packages that utilize familiar and easy-to-understand data plans.

Kymeta u7 satellite terminals with KĀLO service plans deliver an economical, end-to-end, mobile broadband solution.

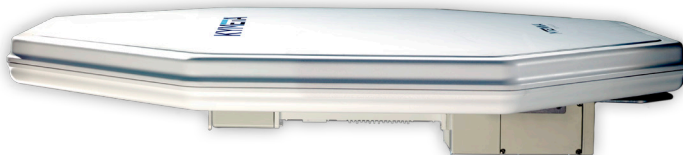

- **Robust** – Hardened and tested to work in land-mobile and maritime environments
- **Easy** – Satellite technician not required for installation, setup, commissioning and provisioning
- **Reliable** – Solid state electronically-steered antenna, no gimbals, no motors required
- **Agile** – Fast tracking, on-the-move connectivity supports mobile broadband

KYMETA u7 TERMINAL FEATURES

- Simple power-on startup and auto-acquisition for easy operation; auto-commissioning available for KĀLO service
- Low-power electronic beam steering for low maintenance and fast, reliable connectivity
- Over-the-air (OTA) software updates
- Cloud-based customer portal for support and service management tools with APIs for simple integration
- Flat-panel for low-profile installation options
- Flexible mounting solutions for vessels and vehicles
- Region-specific versions available for ITU Regions 1/2 (u7m and u7x models) and ITU Region 3 (u7h model)
- Extreme environment version available for high temperature, high solar load deployments in Regions 1/2 (u7x model)


TERMINAL SPECIFICATIONS*

ANTENNA	
Band	Ku
Antenna type	Electronically scanned array
Polarization	Vertical and horizontal, software defined
RX frequency range ⁽¹⁾	u7x: 11.2 GHz to 12.1 GHz
	u7m: 11.4 GHz to 12.3 GHz
	u7h: 11.8 GHz to 12.7 GHz
G/T (broadside)	9.5 dB/K
RX instantaneous bandwidth	>100 MHz
RX scan roll-off @ 60°	Cos ^{1.1-1.2}
TX frequency range	14.0 GHz to 14.5 GHz
EIRP (broadside)	8 W BUC: 41.5 dBW
	16 W BUC: 44.5 dBW
TX instantaneous bandwidth	>100 MHz
TX scan roll-off @60°	Cos ^{1.2-1.4}
TRACKING	
Tracking rate	>20°/second
Scan angles	Theta up to 75° off broadside; Phi 360°
Accuracy	<0.2°
Tracking receiver type	Integrated DVB-S2
POWER AND RF SYSTEM	
Input power	110 VAC to 240 VAC 50/60 Hz
Power consumption	8 W BUC: 300 W (typical), 500 W (peak)
	16 W BUC: 400 W (typical), 600 W (peak)
INTERFACES	
Network interface	RJ45 10/100/1000
RF cables	N-type connectors
ACCESSORIES	
Interface cables	Available in 3.66 m, 7.62 m, or 15.24 m (12 ft., 25 ft., or 50 ft.)
RF cables	Available in 3.66 m, 7.62 m, or 15.24 m (12 ft., 25 ft., or 50 ft.)

MECHANICAL	
Outdoor unit dimensions	L 82.3 cm × W 82.3 cm × D 16.5 cm (L 32.4 in. × W 32.4 in. × D 6.4 in.)
Outdoor unit weight	u7x, u7h: 18.14 kg (40 lb.)
	u7m ⁽²⁾ : 20.41 kg (45 lb.)
Outdoor unit mounting interface	4 × M8 × 1.25 mounting standoff 0.95 cm (0.375 in.) deep
Indoor unit dimensions (maximum)	W 44.5 cm × D 31.75 cm × H 9.06 cm (W 17.5 in. × D 12.5 in. × H 3.57 in.)
Indoor unit weight	6.35 kg (14.0 lb.)
ENVIRONMENTAL (OUTDOOR UNIT)	
Operational temperature ⁽¹⁾	u7m, u7h: -25 °C to +55 °C
	u7x (antenna): -25 °C to +65 °C
	u7x (terminal): -25 °C to +55 °C
Storage temperature	-40 °C to +75 °C
Ingress protection	IP66
Shock	IEC 60068-2-27
Vibration	MIL-STD-167-1A
	MIL-STD-810G
	IEC 60068-2-57
	IEC 60068-2-64
ENVIRONMENTAL (INDOOR UNIT)	
Operational temperature	0 °C to +50 °C
Storage temperature	-40 °C to +75 °C
Ingress protection	IP20
Shock	IEC 60068-2-27
Vibration	MIL-STD-810G
BTU/hr	8 W BUC: 1025 (typical), 1700 (peak)
	16 W BUC: 1375 (typical), 2050 (peak)
COMPLIANCE	
Earth Station License	FCC 44 CFR 25.222 and 25.226
Certifications	UL, FCC, CE, WEEE, and ROHS

Notes: (1) Terminal version availability: u7x - Q3 2019; u7m - now; u7h - March 2019. (2) A lighter version of u7m terminal will be available in Q3 2019.

*Specifications are subject to change.

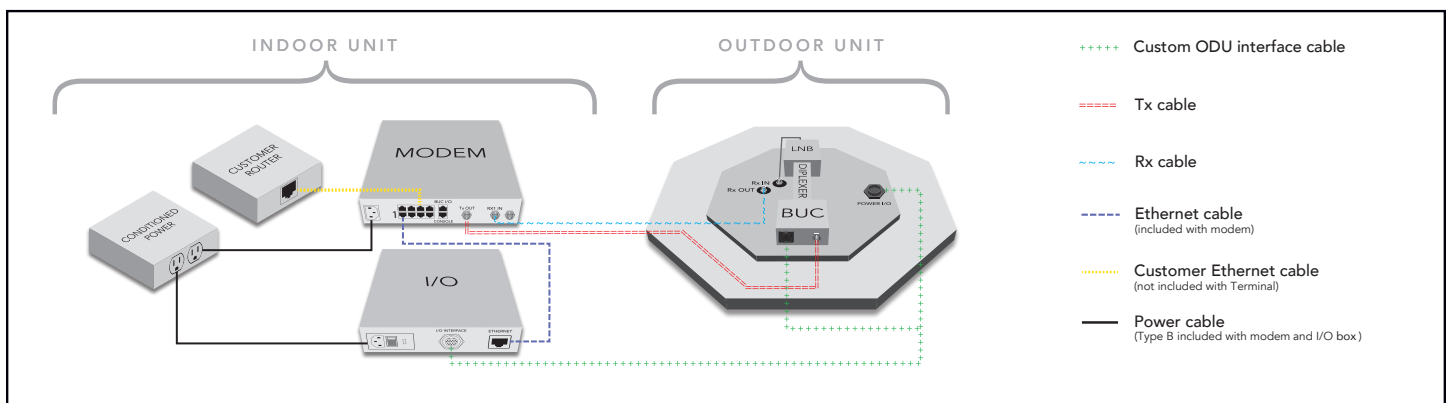

12277 134th Ct NE, Redmond, WA 98052, USA | +1 (425) 896-3700 | www.kymetacorp.com
twitter.com/KymetaCorp | facebook.com/kymetacorp | instagram.com/kymeta | linkedin.com/company/kymeta-corporation

© 2019 Kymeta Corporation and its affiliates. KYMETA, MTENNA, CONNECTED BY KYMETA, KĀLO image, and KĀLO are trademarks of Kymeta Corporation, with registrations or pending applications for these marks in Brazil, the European Union, Japan, Norway, Singapore, South Korea, and the United States. All other trademarks are the property of their respective owners.